

FIG. 1
(PRIOR ART)

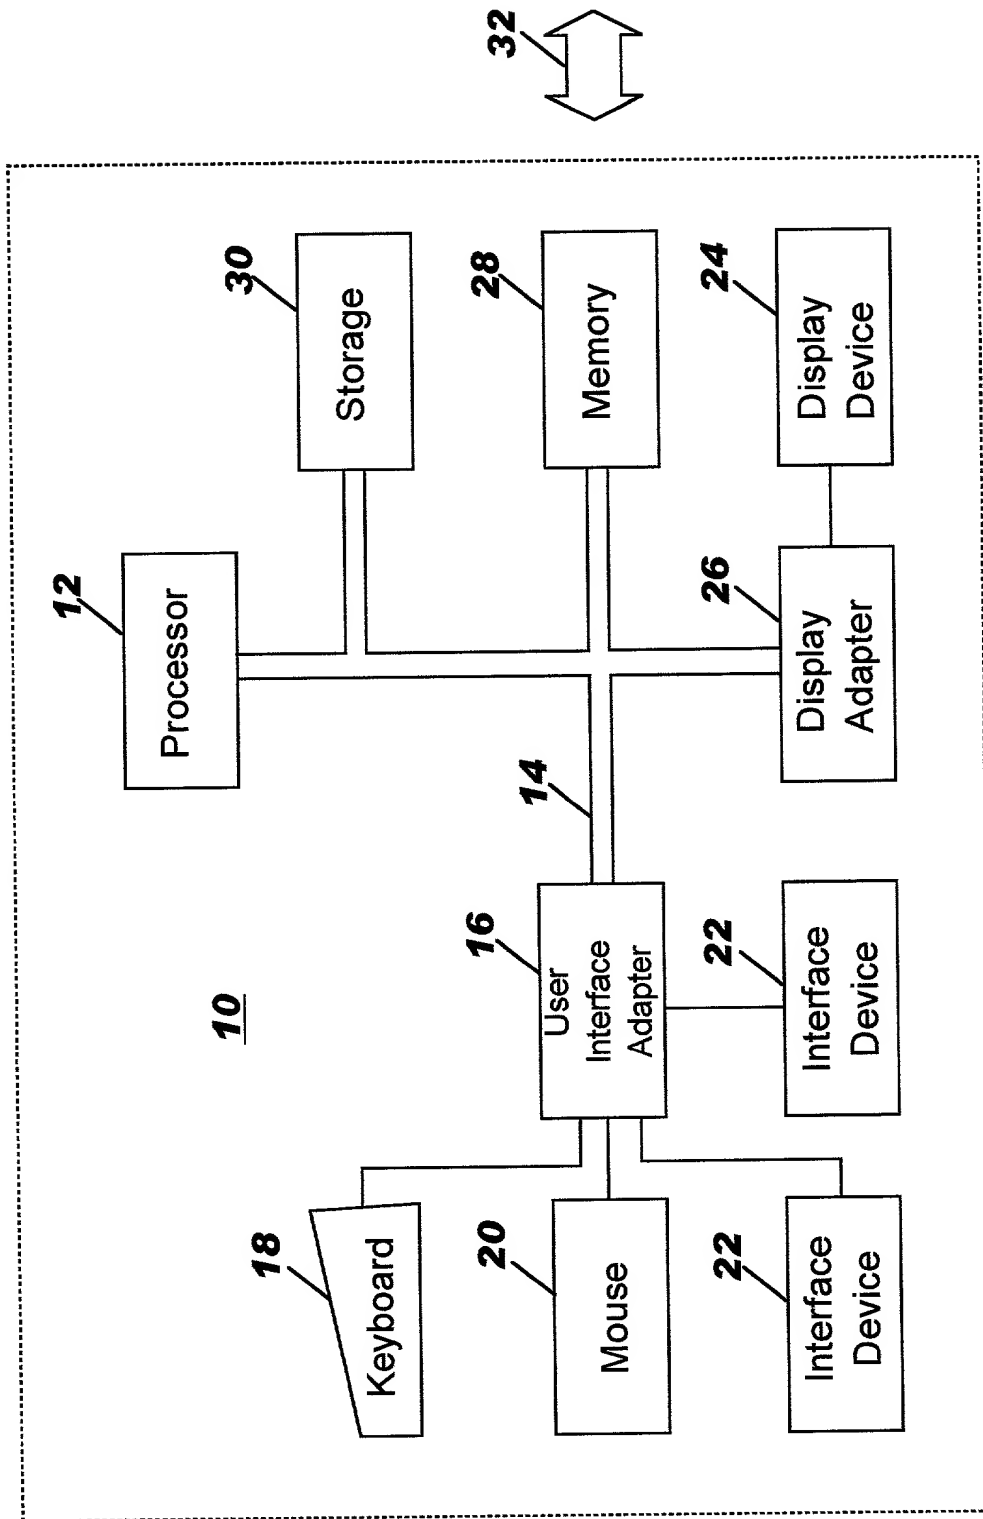


FIG. 2
(PRIOR ART)

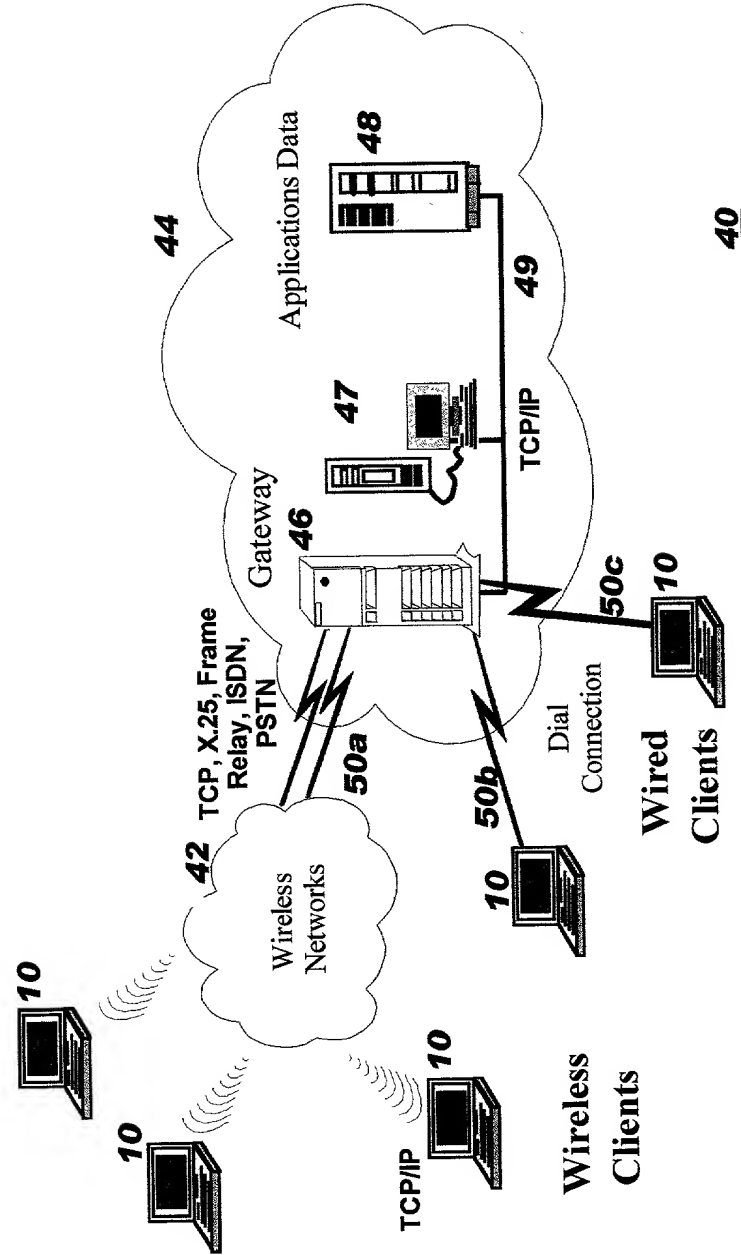


FIG. 3

300

Database Topology

Enter IP address of Linux® server(s):
(for IBM WebSphere® Application Server)

xxx.xxx.xxx.xxx
More...

Enter IP address of AIX® server(s):
(for IBM DB2® database server)

xxx.xxx.xxx.xxx
More...

Enter IP address of Windows® client(s):
(for WebSphere and DB2 clients)

xxx.xxx.xxx.xxx
More...

Done

FIG. 4

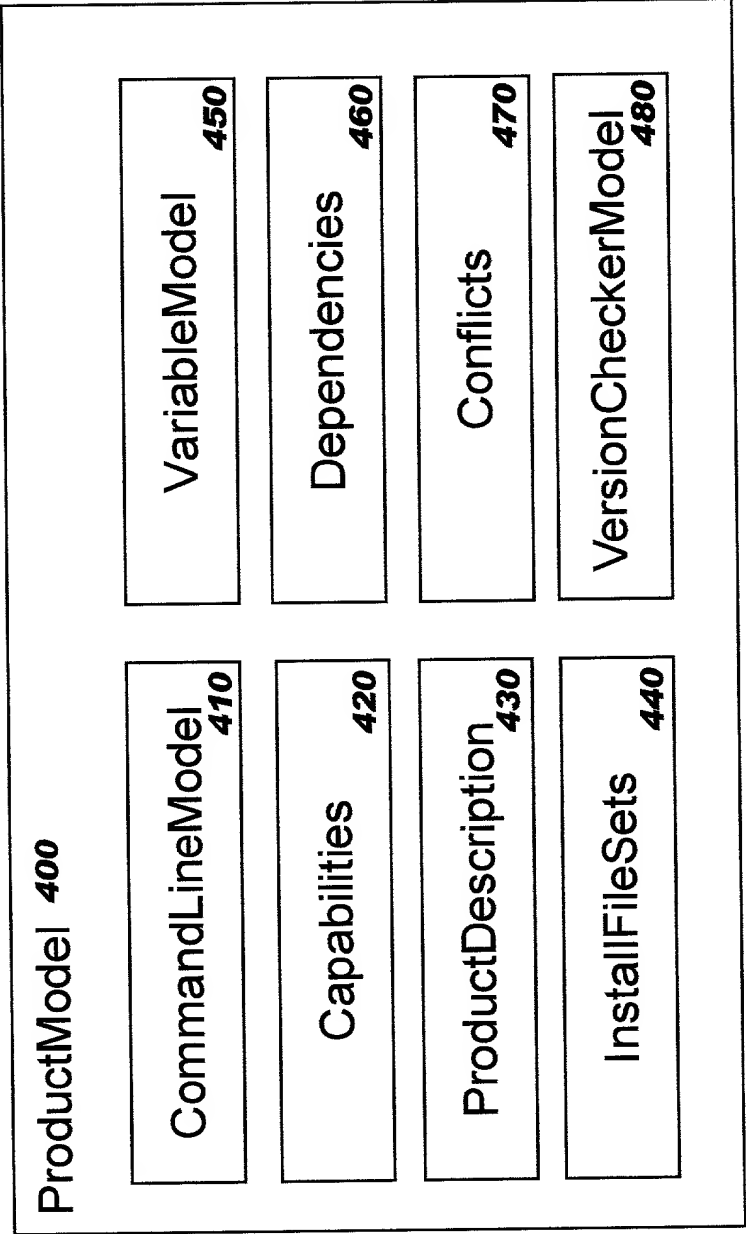


FIG. 5

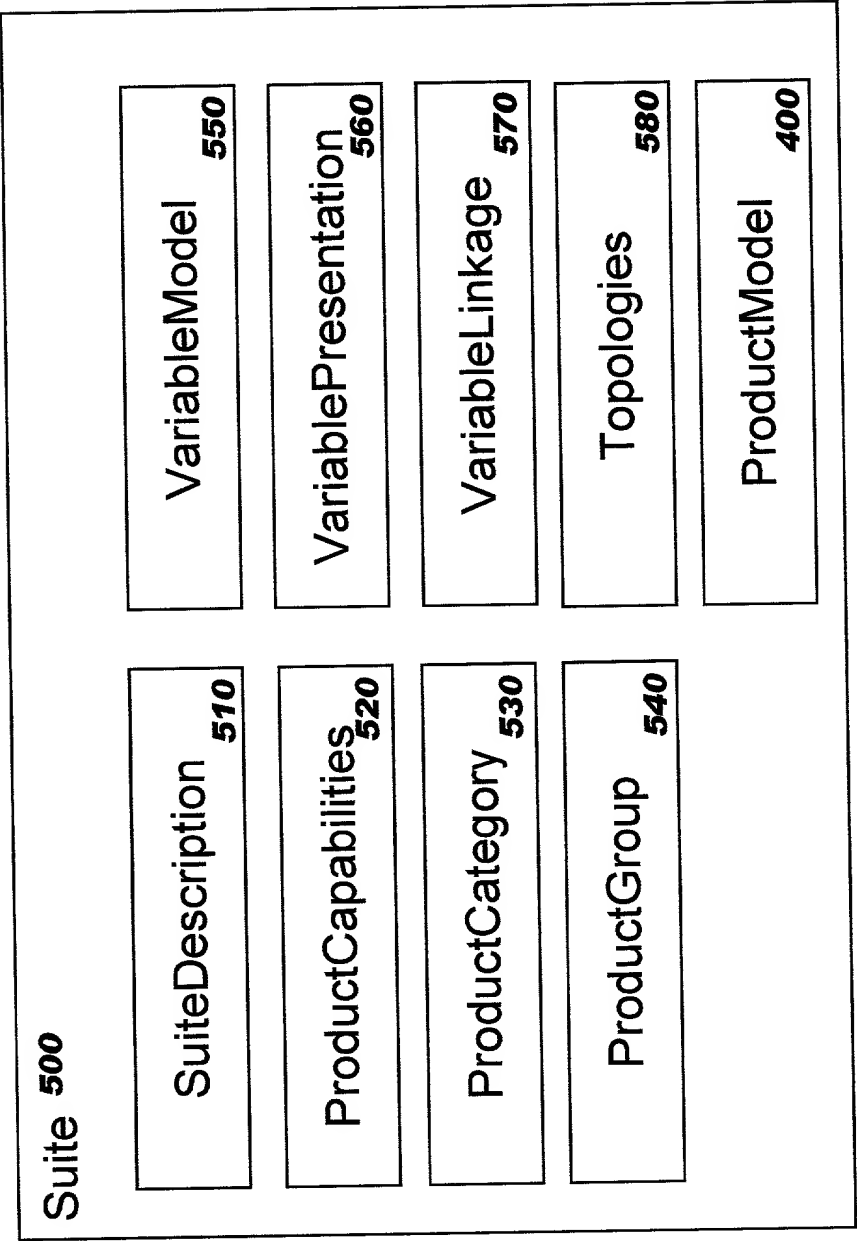


FIG. 6

```
{ "product_vendor", "IBM" },  
{ "product_name", "DB2 Universal Database Run-Time Client" },  
{ "product_description", "<html>Provide the following information and click  
<b>Finish</b> to proceed.<br>Click a field name for additional information about the  
field.</html>" },  
{ "product_icon", "com/ibm/cbf/icons/db2.gif" },  
{ "files_DB2RTClient71Win_prompt_string", "Specify the location of the install image for this product  
(for example, the CD-ROM drive or mount point)" },  
{ "jar_name", "CBN_db2rtclientwin" },
```

FIG. 7

```
{ "value_DB2_Runtime_Client_prod_path_keyword", "FILE"},  
{ "value_DB2_Runtime_Client_prod_path_section", " " },  
{ "var_DB2_Runtime_Client_prod_path_minimum_length", "3" },  
{ "var_DB2_Runtime_Client_prod_path_mnemonic", "D" },  
{ "var_DB2_Runtime_Client_prod_path_help_text", "The directory where you want to install  
the application files." },  
{ "var_DB2_Runtime_Client_prod_path_label_text", "Destination Directory" },  
{ "value_DB2_Runtime_Client_prod_path", "C:\\SQLLIB" },
```

FIG. 8

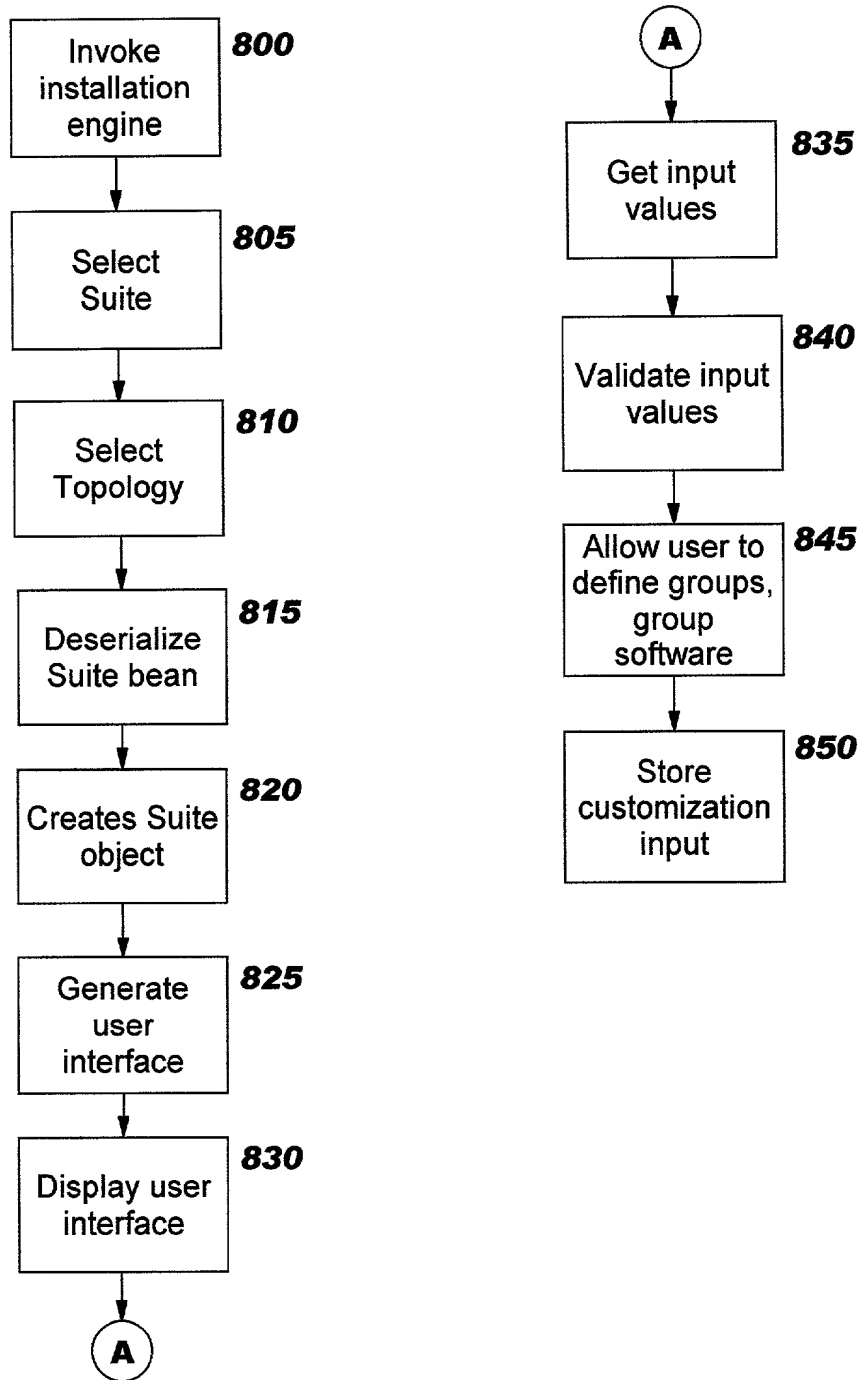


FIG. 9

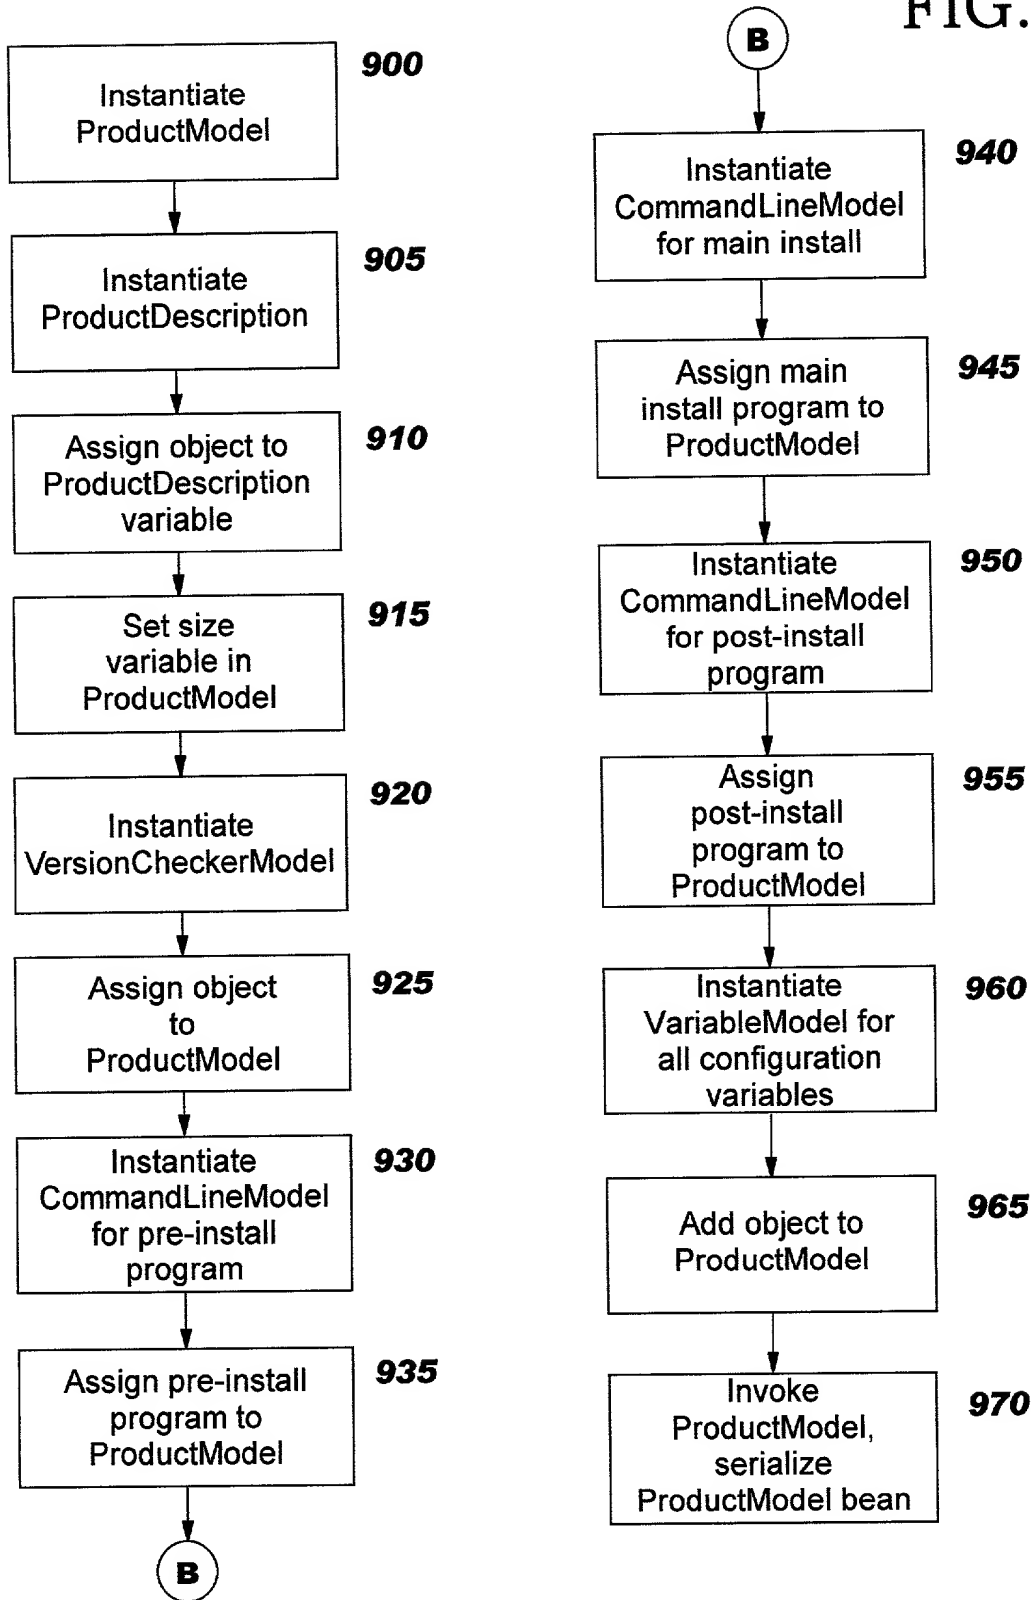


FIG. 10

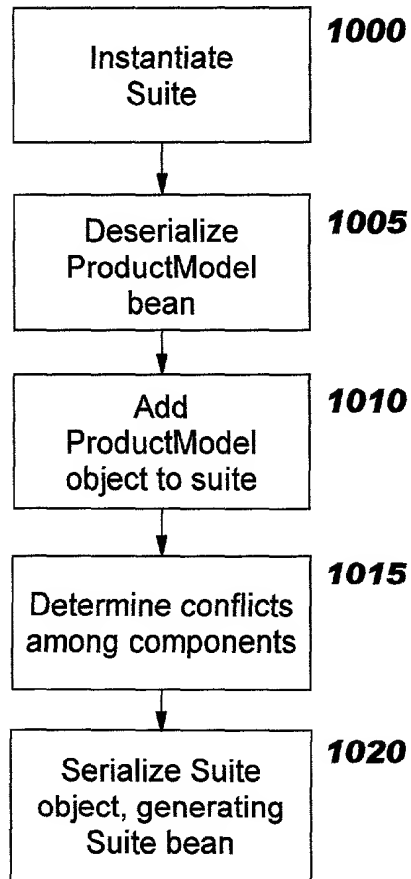


FIG. 11A

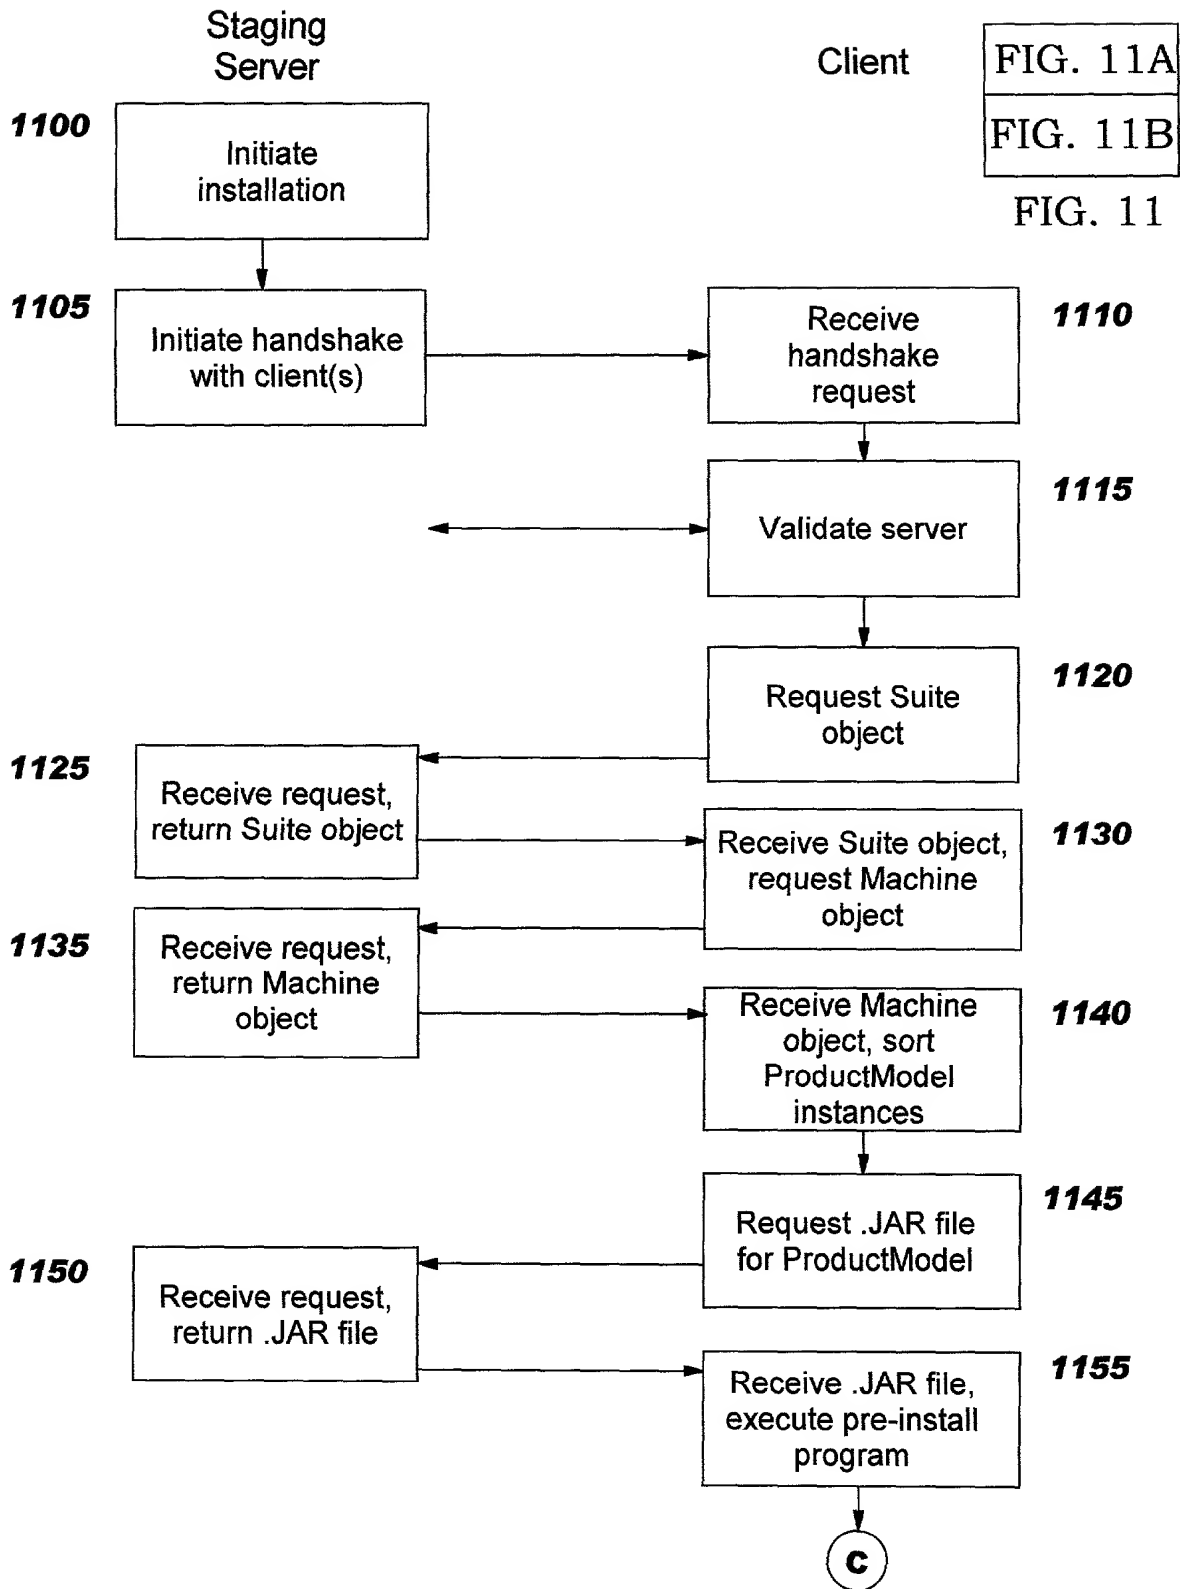


FIG. 11B

